

10/519790

FIG. 1

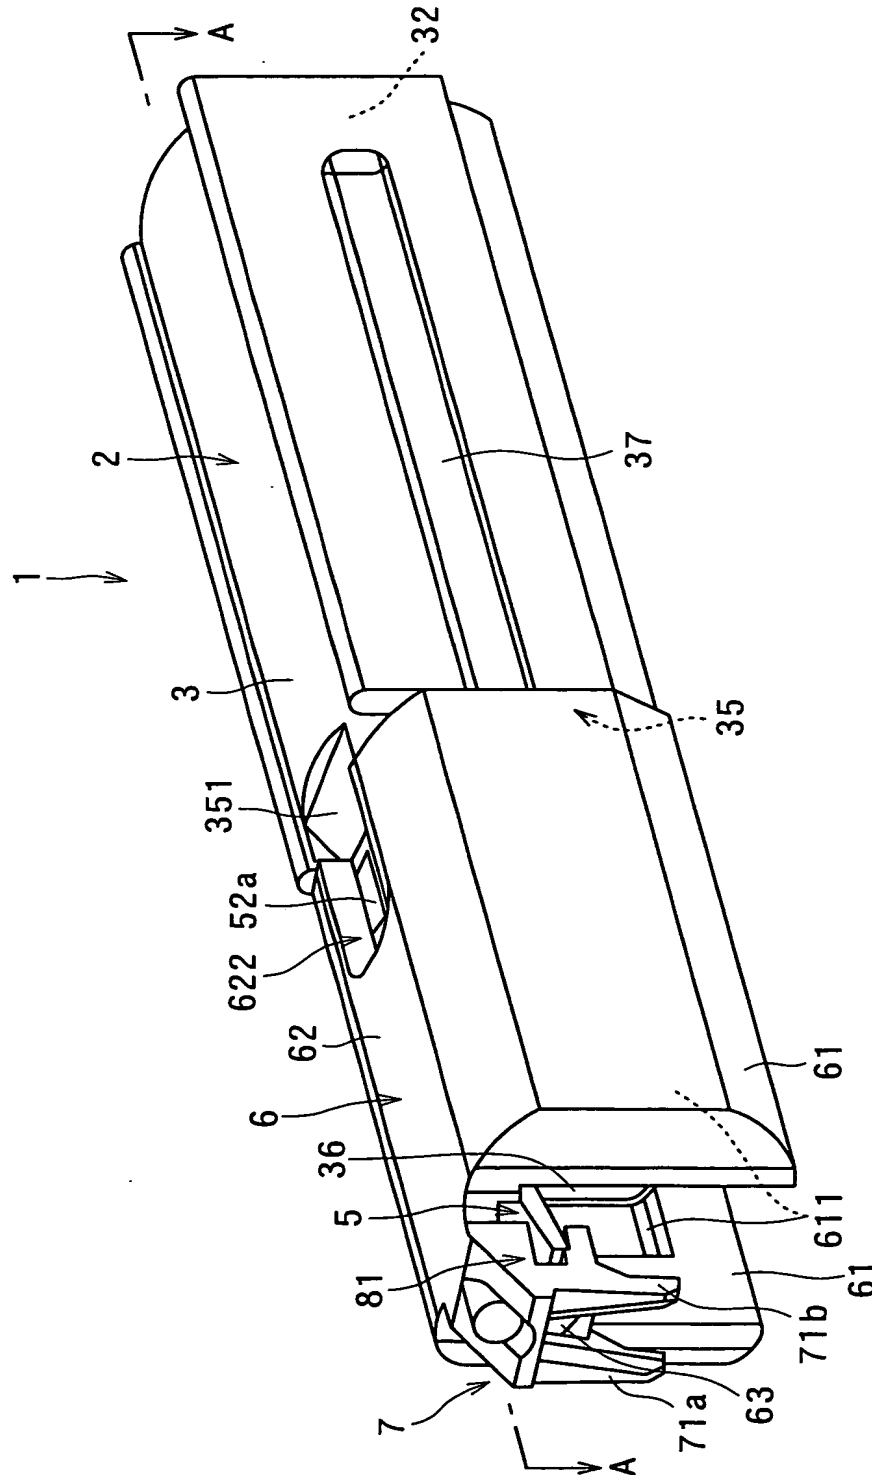


FIG. 2

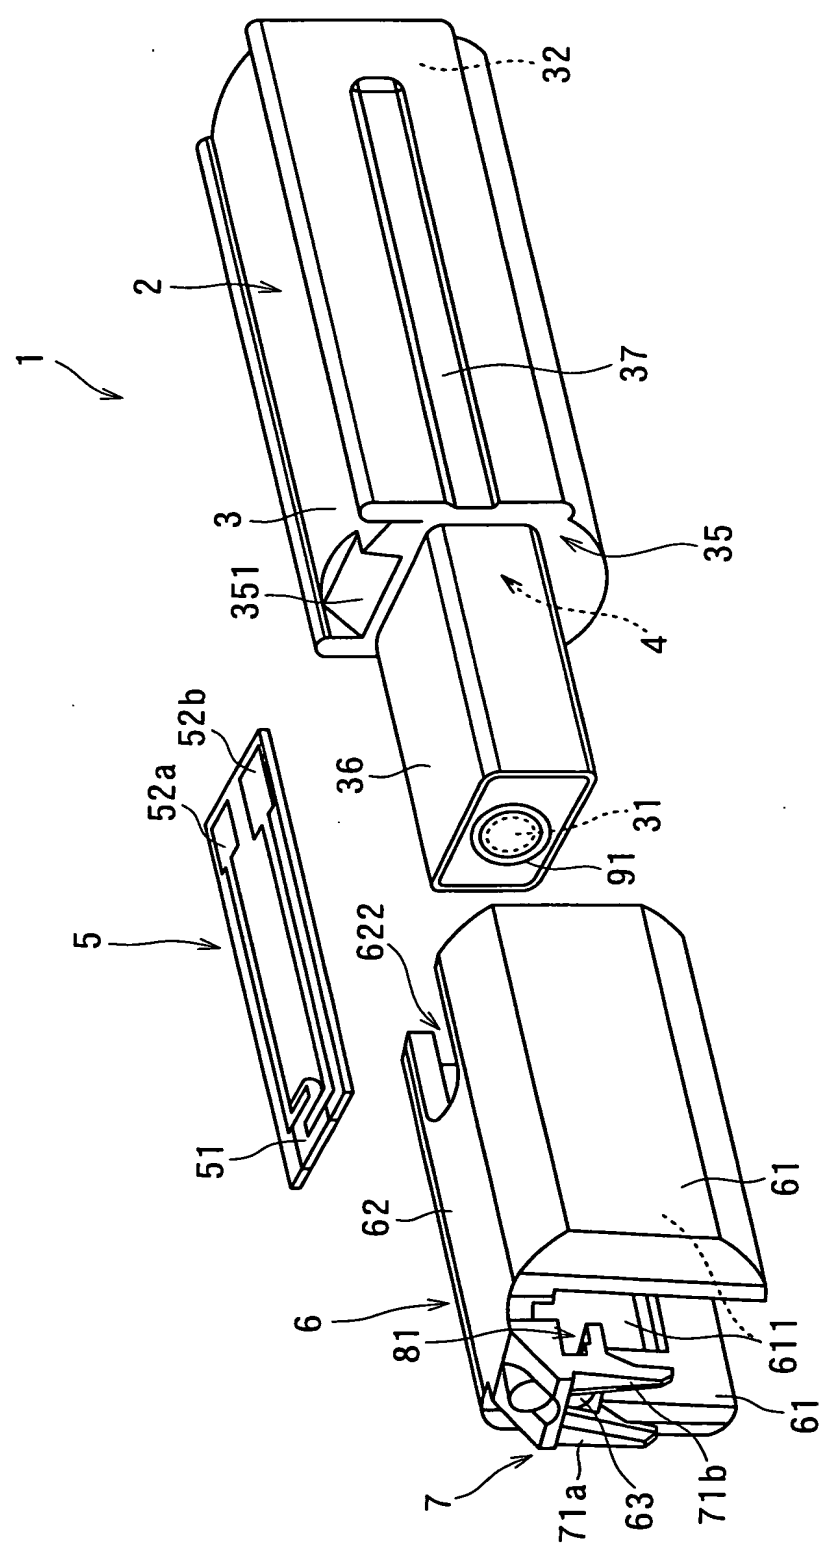


FIG. 1 is a perspective view of a first embodiment of a device. The device includes a base 61 with a top surface 62 and side surfaces 621. A central component 81 is mounted on the base. A first arm 71a and a second arm 71b are pivoted to the base at points 631 and 632 respectively. A spring 63 is connected between the arms. A first member 611 and a second member 811 are also shown. Dimensions D and L are indicated.

F I G. 6

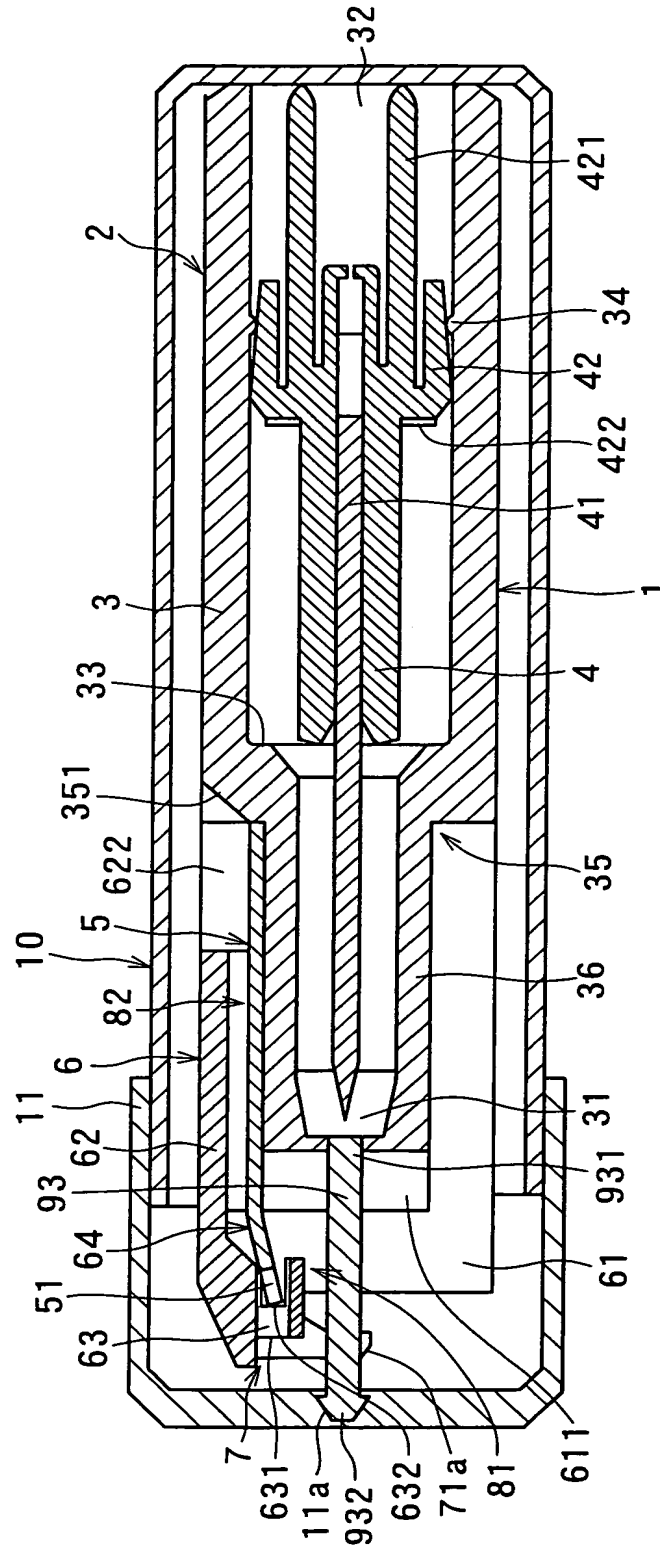


FIG. 7

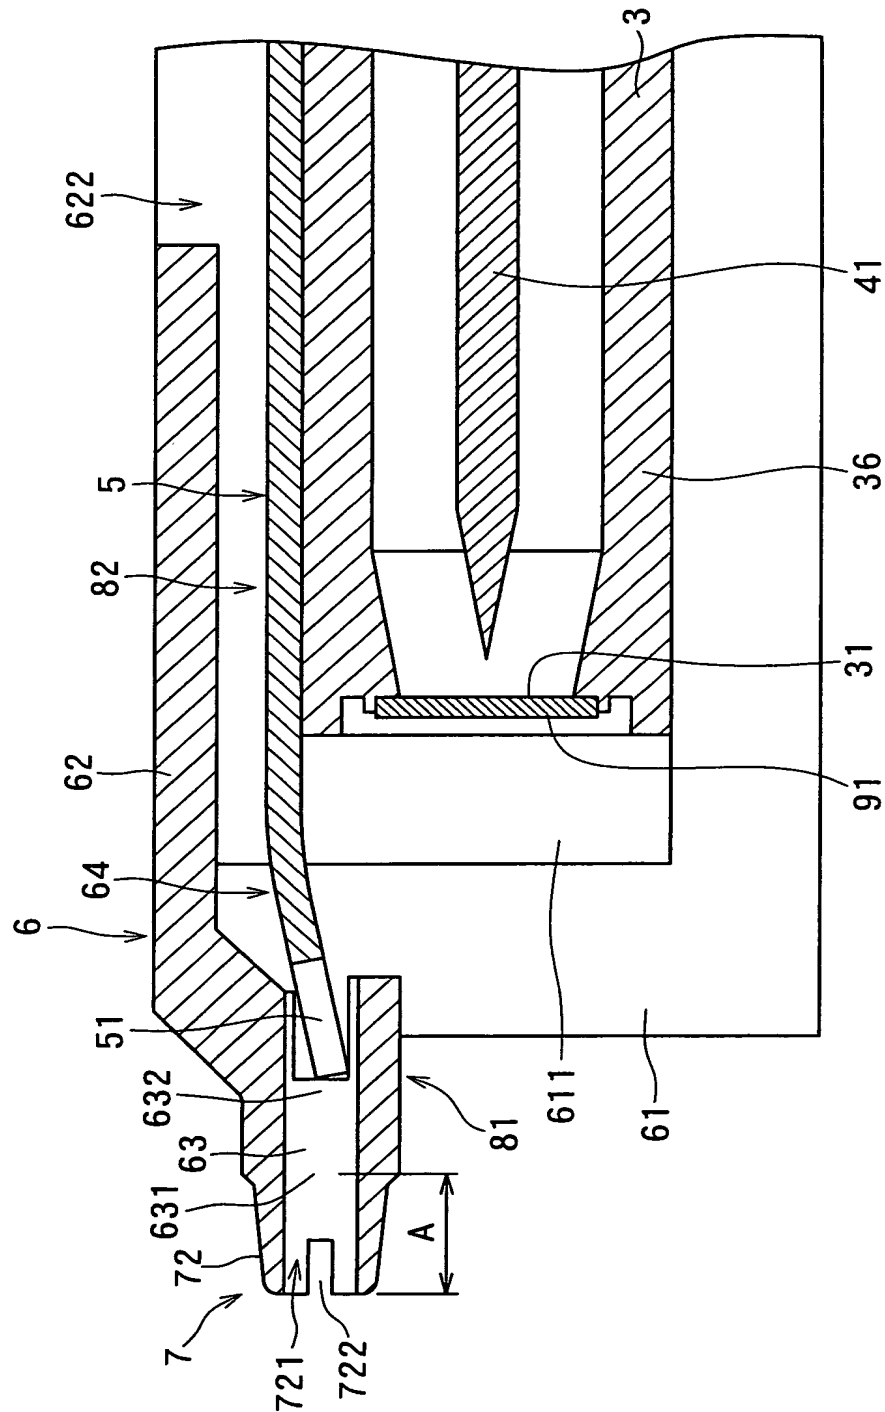


FIG. 8

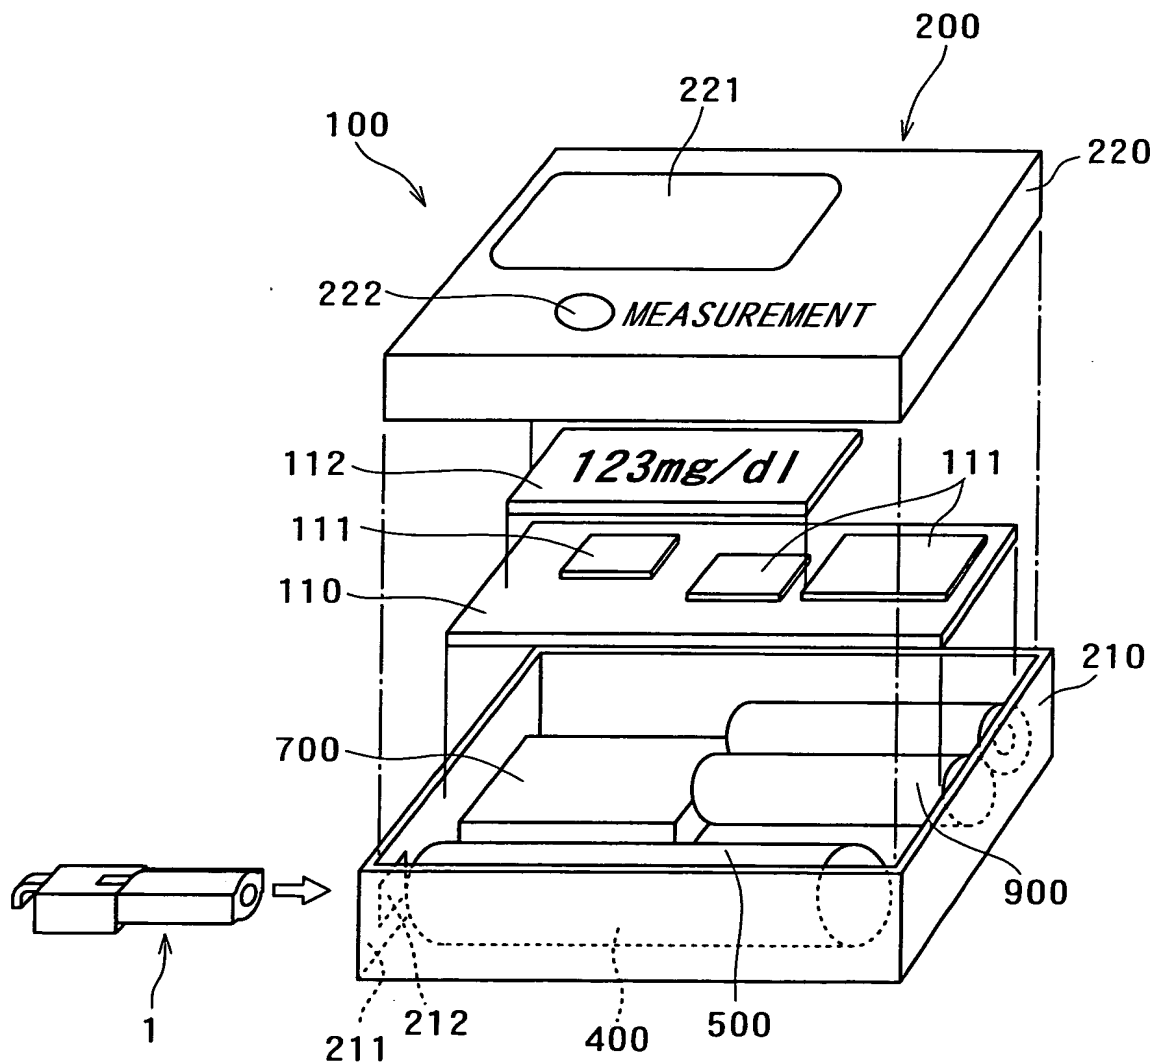


FIG. 9

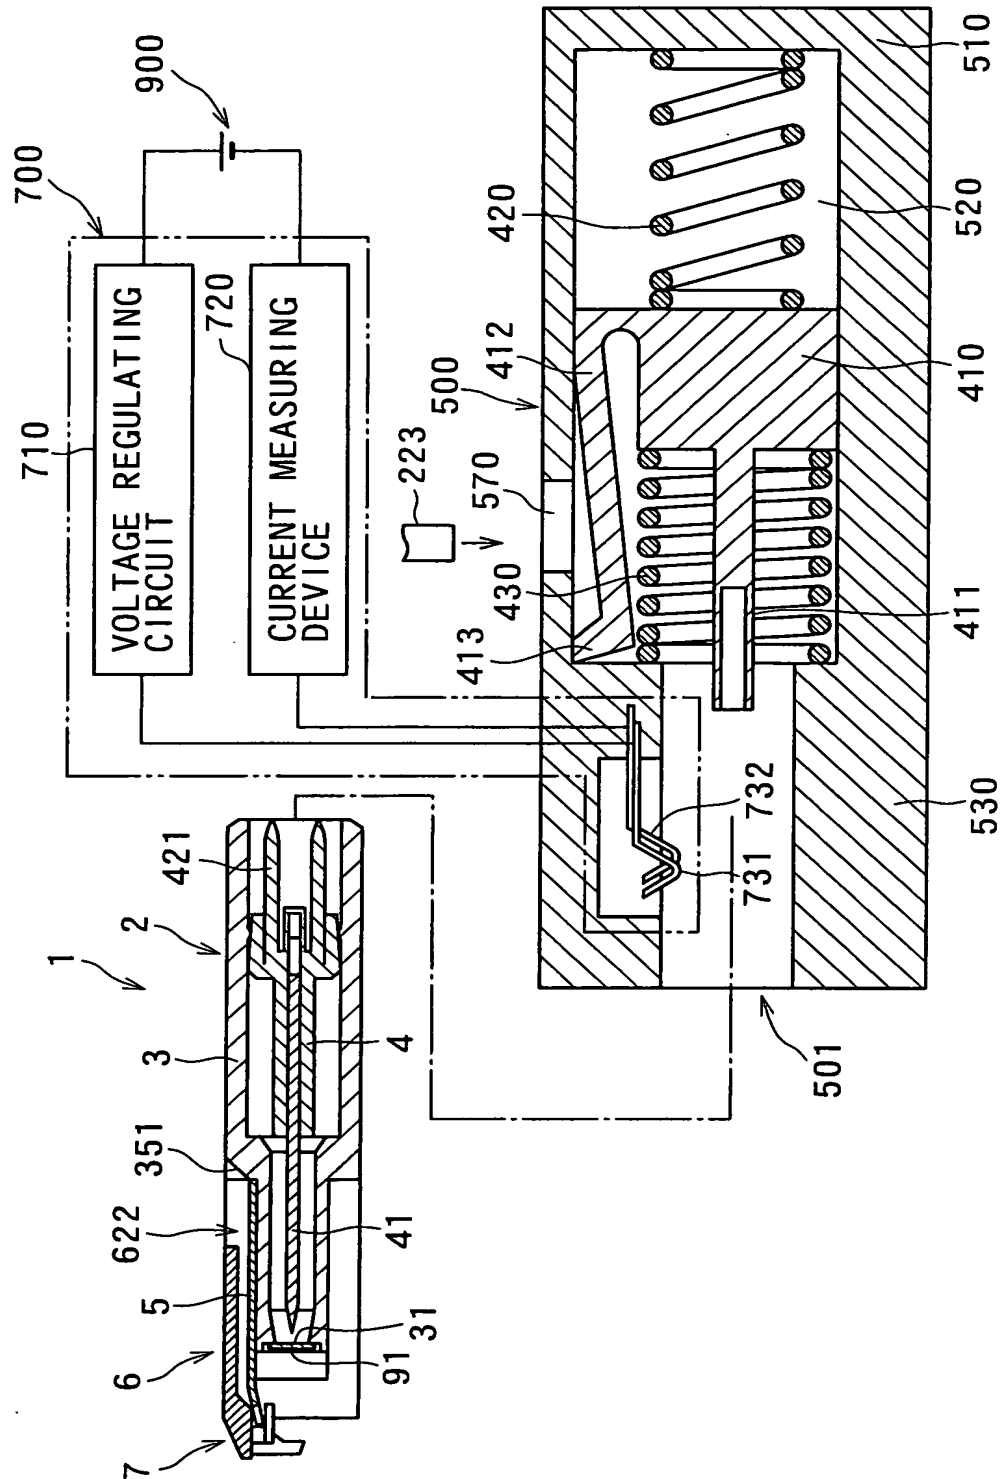


FIG. 10

